







SL3131 SLI-14D T30stack

MAXIMUM CAPACITY (DRY WEIGHT) PER POCKET		30 lb	<b>13.61 kg</b>	
TUMBLER DIAMETER		30"	<b>76.20 cm</b>	
TUMBLER DEPTH		27"	<b>68.58 cm</b>	
TUMBLER VOLUME PER POCKET		11.04 cu ft	<b>312.62 L</b>	
TUMBLER/DRIVE MOTOR PER POCKET		1/4 hp	<b>0.19 kW</b>	
BLOWER/FAN MOTOR PER POCKET		1/2 hp	<b>0.37 kW</b>	
DOOR OPENING (DIAMETER)		19-3/8"	<b>49.21 cm</b>	
DOOR SILL HEIGHT TOP POCKET / BOTTOM POCKET		54-11/16" / 14-7/8"	<b>138.91 cm / 37.78 cm</b>	
WATER CONNECTION		3/4"-11.5 NH (North America)		
		3/4" B.S.P.T. (Outside North America)		
DRYERS PER 20'/40' CONTAINER		12 / 28		
DRYERS PER 48'/53' TRUCK		34 / 38		
<b>Gas</b>	VOLTAGE AVAILABLE		120-240V 1ø 2w 50/60 Hz	
	APPROXIMATE NET WEIGHT		550 lb <b>249.48 kg</b>	
	APPROXIMATE SHIPPING WEIGHT		580 lb <b>263.08 kg</b>	
	AIRFLOW PER POCKET		60 Hz 360 cfm <b>10.19 cmm</b>	
			50 Hz 300 cfm <b>8.49 cmm</b>	
	HEAT INPUT PER POCKET		55,000 Btu/hr <b>13,860 kcal/hr</b>	
	EXHAUST CONNECTION (DIAMETER) PER POCKET		6"	<b>15.24 cm</b>
	COMPRESSED AIR CONNECTION		N / A	
	COMPRESSED AIR VOLUME		N / A	
	INLET PIPE CONNECTION PER POCKET		1/2" M.N.P.T.	
<b>Electric</b>	VOLTAGE AVAILABLE		200-416V 1,3ø 2,3,4w 50/60 Hz	
	APPROXIMATE NET WEIGHT		550 lb <b>249.48 kg</b>	
	APPROXIMATE SHIPPING WEIGHT		580 lb <b>263.08 kg</b>	
	AIRFLOW PER POCKET		60 Hz 360 cfm <b>10.19 cmm</b>	
			50 Hz 300 cfm <b>8.49 cmm</b>	
	EXHAUST CONNECTION (DIAMETER) PER POCKET		6"	<b>15.24 cm</b>
	COMPRESSED AIR CONNECTION		N / A	
	COMPRESSED AIR VOLUME		N / A	
	OVEN SIZE PER POCKET			
	kW	Btu/hr	<b>kcal/hr</b>	
	7.9	26,962	<b>6,794</b>	
	8.3	28,327	<b>7,138</b>	
	9.0	30,716	<b>7,740</b>	
	11.3	38,566	<b>9,719</b>	
	12.4	42,320	<b>10,665</b>	
12.5	42,661	<b>10,751</b>		
13.5	46,074	<b>11,611</b>		
<b>Steam</b>	VOLTAGE AVAILABLE		120-240V 1ø 2w 50/60 Hz	
	APPROXIMATE NET WEIGHT		580 lb <b>263.08 kg</b>	
	APPROXIMATE SHIPPING WEIGHT		610 lb <b>276.69 kg</b>	
	AIRFLOW PER POCKET		60 Hz 360 cfm <b>10.19 cmm</b>	
			50 Hz 300 cfm <b>8.49 cmm</b>	
	STEAM CONSUMPTION PER POCKET		63 lb/hr <b>28.58 kg/hr</b>	
	OPERATING STEAM PRESSURE		150 psi max <b>10.34 bar</b>	
	EXHAUST CONNECTION (DIAMETER) PER POCKET		6"	<b>15.24 cm</b>
	COMPRESSED AIR CONNECTION		N / A	
	COMPRESSED AIR VOLUME		N / A	
	BOILER HORSEPOWER (NORMAL LOAD) PER POCKET		1.75 Bhp	
	SUPPLY CONNECTION PER POCKET		1/2" F.N.P.T.	
RETURN CONNECTION PER POCKET		1/2" M.N.P.T.		

Shaded areas are stated in metric equivalents

SL3131

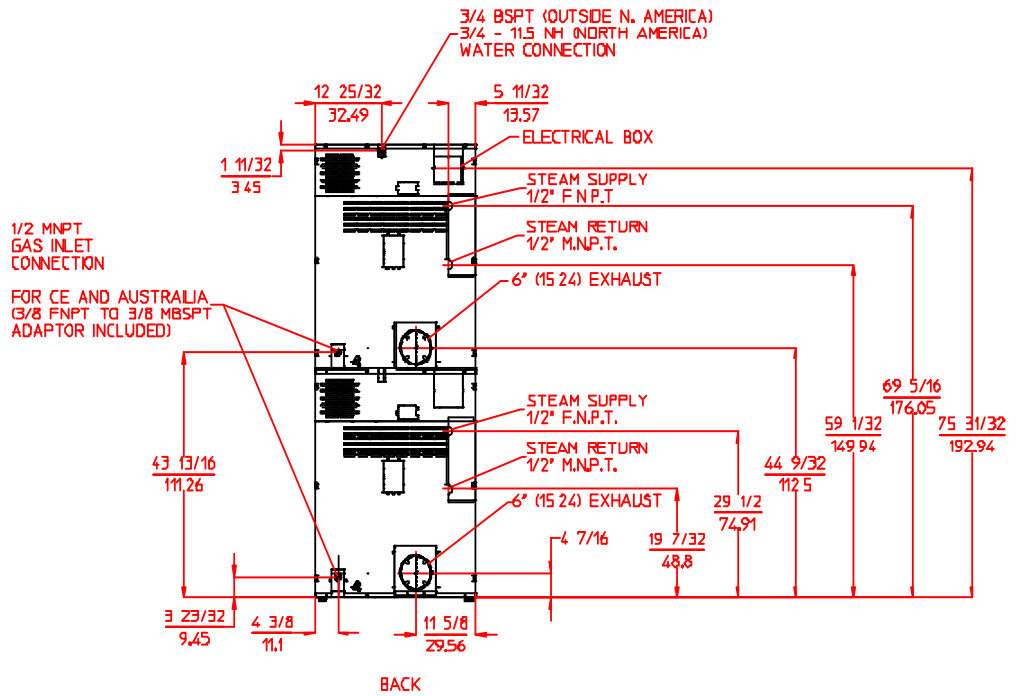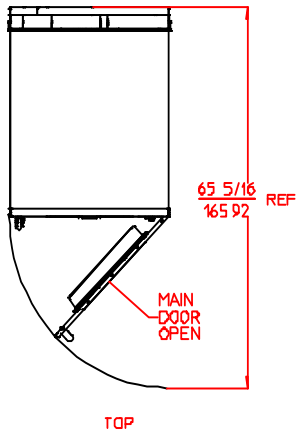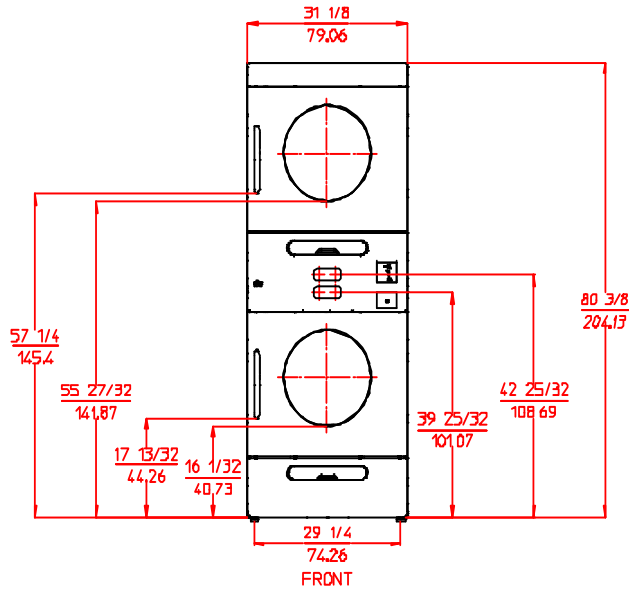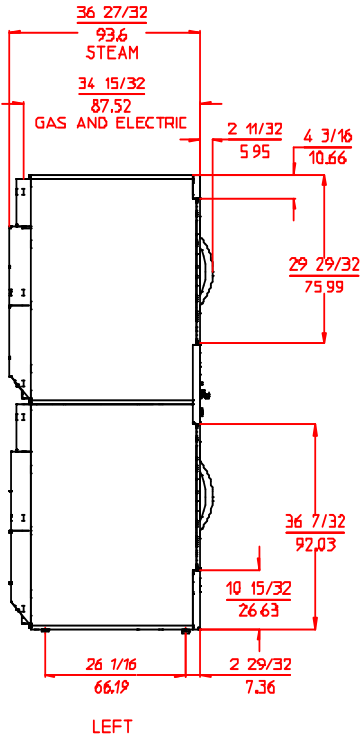

5/16/07



88 Currant Road • Fall River, MA 02720  
 Tel. 508-678-9000 • Fax 508-678-9447  
 sales@amdry.com • www.amdry.com